




MONOTRAC POWER RTS 230 V INSTALLATION




Tension jack Galvanised metal for ceiling fixation



Clip White metal for ceiling fixation

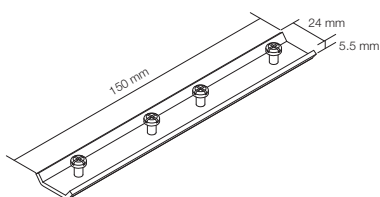


Rail joint Metallic plate, zinc plated with fixing screws

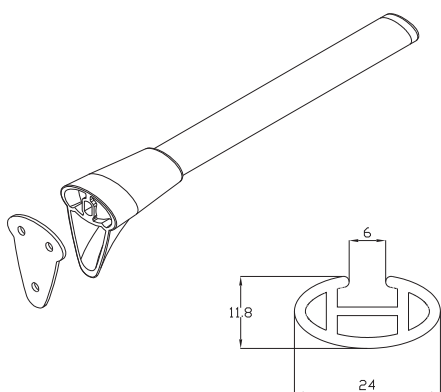

Universal bracket Wall fixation with aluminium brackets, cutting to size on-site possible

Colours Standard anodized aluminium
Standard white RAL 9016
Other colours upon inquiry

Measures	Length	Height
	approx. 130-150 mm	approx. 55 mm
	approx. 180-200 mm	approx. 55 mm
	approx. 230-250 mm	approx. 55 mm




Wall support Fixing to wall with galvanized metal support


Colours Standard galvanized grey
Standard white RAL 9016
Other colours upon inquiry

Measures	Length	Height
	approx. 50 mm	approx. 60 mm
	approx. 80 mm	approx. 80 mm
	approx. 100 mm	approx. 80 mm
	approx. 120 mm	approx. 80 mm
	approx. 150 mm	approx. 80 mm
	approx. 180 mm	approx. 100 mm


MONOTRAC POWER RTS 230 V INSTALLATION

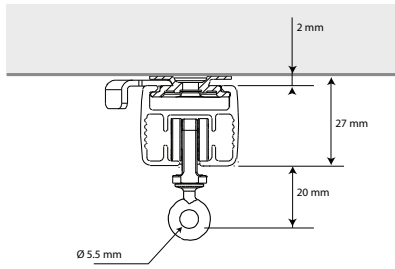


Ceiling fixation with tension jack

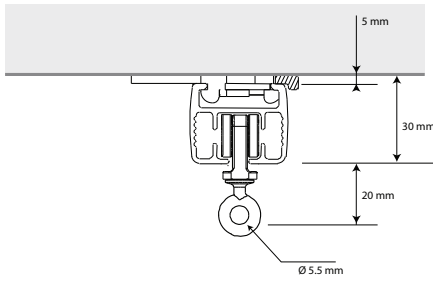

Ceiling fixation with clip

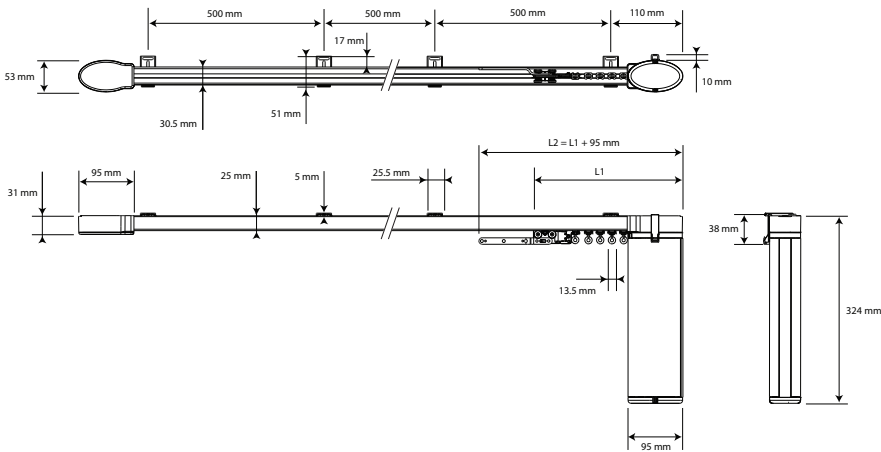

Lateral opening (one way)

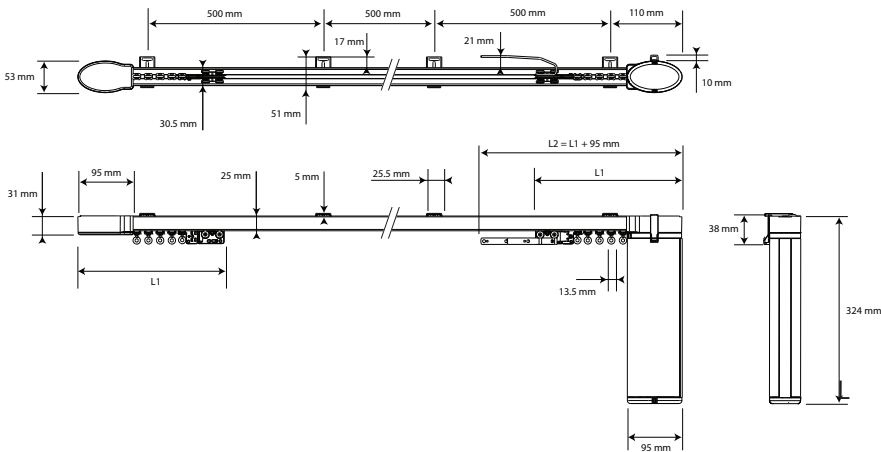

Central opening (two way)

Stack size:
 $L1 = 175 \text{ mm} + \text{number of runners}$
 (13,5 mm per runner)
 $L2 = L1 + 95 \text{ mm}$